

# Kelley Blockade™ Dock Shelter

## Model BDS-K



Facilities face greater challenges today regarding environmental control at the loading dock. Maintaining consistent temperature control, avoiding energy loss, effectively sealing varying trailer configurations, and meeting regulatory requirements are real issues. Additionally, air ride suspension and intermodal trailers create more abrasive movement on dock shelters. The Kelley Blockade™ model BDS-K Dock Shelter is specifically designed for the most demanding applications.




**Kelley exclusive SHARC™ (Super High Abrasion Resistant Compound) fabric features superior wear resistance.** Tested and certified to **40,000+ abrasion cycles** which is up to **ten times** the abrasion resistance of the competitive fabrics tested. (Reference Kelley fabric comparison)

- ① Exclusive AQS-900 AquaShield® Integral system effectively blocks moisture infiltration from the top of trailer.
- ② Exclusive Hinge Guard™ seals off hinge gap around swing out doors, blocking air and light from entering the facility.
- ③ Exclusive SHARC (Super High Abrasion Resistant Compound) fabric on top and bottom wear panels where heaviest trailer abrasion occurs.
- ④ Exclusive LightGuard™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- ⑤ Structural, rigid head frame acts as a canopy while translucent top cover allows increased visibility and operating light.
- ⑥ Exclusive roll-formed, galvanized steel framing extends product life and is superior to wood construction.
- ⑦ Foam-filled side members provide protection from impact by off-center trailers.



**AQUASHIELD® MOISTURE SEALING SYSTEM**

- Integral to the Blockade Dock Shelter to automatically position and seal the top of the trailer
- High-resilient foam core protected by three layers of durable coated fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Weighted side covers provide extra protection for the dock area
- Services trailers 12'-9" to 13'-6" high

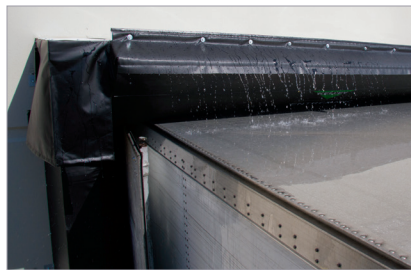

**HINGE GUARD™ GAP SEALING SYSTEM**

- Integral to the Blockade Dock Shelter to automatically position and seal the trailer door hinge gaps
- High Molecular Weight Polyethylene (HMWPE) material capable of withstanding harsh weather conditions and high cycle traffic.
- Hinge Guard specifically shaped and sized to interface with swing out door trailers of varying configurations.
- Attached securely with industrial hook and loop for easy replacement



**ENTRE//MATIC**

**Entrematic**  
 1612 Hutton Dr., Suite 140  
 Carrollton, TX 75006  
 800.558.6960  
[www.kelleyentrematic.com](http://www.kelleyentrematic.com)

Entrematic reserves the right to change specifications and designs without notice and without incurring obligations. Entrematic products may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents. Entrematic as word and logo are registered trademarks belonging to Entrematic Group AB or other companies controlled by the same organization. All rights reserved.