


# HULK<sup>®</sup> SERIES DOUBLE SCISSOR TABLE

L I F T P R O D U C T S S P E C I F I C A T I O N S



## Design Highlights

- Pre-wired Power Unit with UL Approved Control Panel
- Self Lubricating Bushings
- Solid Steel Legs with Hard Chromed Pins
- Velocity Fuses on All Cylinders to Prevent Uncontrolled Descent
- Wire Braided Hydraulic Hoses
- Polyethylene Reservoir Allows Easy Visual Check of Oil Level or Steel Reservoir with Dip Stick
- Maintenance Strut
- Meets or Exceeds The ANSI MH29.1 Standard for Industrial Scissors Lifts
- 1 HP Power Unit Single Phase with 115 VAC Control Valve

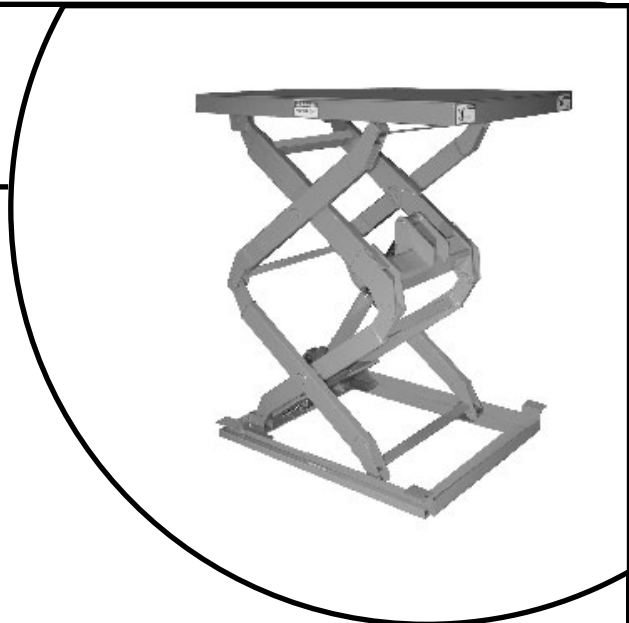

## Available Options

- Tapered Toe Guards
- Foot Switch with Cover - NEMA 1
- In Motor Warning Beeper and Flashing Light on a Post X 60" High or Wall Mounted Bracket
- Increased Horsepower Available
- Manual Lowering Valve Located at Power Pack
- 1 HP Air/hydraulic Power Unit with Air Lever Valve or Air Foot Valve and 10' of Hose
- Portability with Casters
- Stainless Steel
- Accordion Bellow - Yellow/black 4 Sides of Base
- Hot Dip Galvanizing
- Special Color
- Other \_\_\_\_\_

## Project Information

Job Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 General Contractor \_\_\_\_\_  
 Distributor \_\_\_\_\_  
 Model \_\_\_\_\_ Quantity \_\_\_\_\_ Voltage/Phase \_\_\_\_\_



# HULK<sup>®</sup> SERIES DOUBLE SCISSOR TABLE

## L I F T P R O D U C T S S P E C I F I C A T I O N S

Model No.	Travel [in]	Capacity [lb]	Standard Platform & Base Frame [in]	Max Platform Size [in]	Lowered Height [in]	Raised Height [in]	Raise Lower Time [sec]	Ship Weight [lb]
SDS48-2	48	2,000	30 x 36	40 x 48	12	60	20	800
SDS60-2	60	2,000	30 x 48	48 x 60	14	74	40	1,220
SDS60-4		4,000	30 x 48	48 x 60	14	74	80	1,350
SDS60-6		6,000	30 x 48	48 x 60	14	74	120	1,650
SDS80-2	80	2,000	30 x 60	48 x 72	14	94	50	1,420
SDS80-4		4,000	30 x 60	48 x 72	14	94	100	1,600
SDS80-6		6,000	42 x 60	48 x 72	18	98	150	1,890
SDS96-2	96	2,000	30 x 72	48 x 96	14	110	70	1,500
SDS96-4		4,000	30 x 72	48 x 96	14	110	140	1,700
SDS96-6		6,000	42 x 72	48 x 96	18	114	210	2,240