


**Kelley Heavy-duty  
2" Insulated Sectional Door**  
KE2432

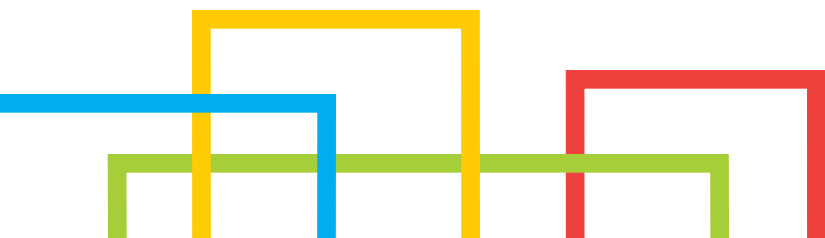

**Built from heavy-duty solid steel to survive in tough commercial environments.**

Two tough steel skins with CFC-free polystyrene insulation sandwiched between make the Kelley KE2432 a strong, efficient and durable door. Add tongue and groove construction, weather-stripping, and a thermal break that provides a strong barrier from extreme heat and cold for an efficient 4-step insulation system.


The 24-gauge steel outer skin features shallow ribs and a stucco embossment. On the interior, 27-gauge steel is also embossed with a stucco pattern to help hide daily wear.



**CONSTRUCTION**

**R-Value 9.05** **Kelley KE2432**  
Heavy-duty, 2" insulated steel door

**TRIPLE-LAYER**  
**Steel + Insulation + Steel**



**Track:** All doors are available with both 2" or 3" track in Standard Lift, High Lift, Vertical Lift, Low Headroom, and Follow the Roof Pitch. Custom track configurations are also available. For drawings and more information, please visit [www.kelleyentrematic.com](http://www.kelleyentrematic.com).

**Springs:** Torsion springs are oil tempered, helical wound and custom computed for each door for a minimum 10,000 cycle life. Optional springs are available up to 100,000 cycle life.

**Hardware:** Hardware includes minimum 14-gauge galvanized steel hinges and 13-gauge galvanized steel track brackets. All rollers have minimum 10-ball bearings.

**SPECIFICATIONS**

	<b>Heavy-duty</b>
	Kelley KE2432
<b>STEEL THICKNESS (Front/Back)</b>	24-ga / 27-ga
<b>PANEL DESIGN</b>	Ribbed
<b>STEEL EMBOSSMENT</b>	Stucco
<b>DOOR THICKNESS</b>	2" (5.1 cm)
<b>CONSTRUCTION LAYERS</b>	Triple
<b>INSULATION<sup>1</sup></b>	Polystyrene
<b>R-VALUE<sup>2</sup></b>	9.05
<b>MINIMUM WIDTH</b>	6'
<b>MAXIMUM WIDTH</b>	24' 2"
<b>MINIMUM HEIGHT</b>	7'
<b>MAXIMUM HEIGHT</b>	24' 1"
<b>WIND LOAD<sup>3</sup> AVAILABLE</b>	•
<b>PAINT FINISH WARRANTY<sup>4</sup></b>	10 Years
<b>WORKMANSHIP/HARDWARE WARRANTY<sup>4</sup></b>	1 Year

<sup>1</sup> Insulation has passed self-ignition, flamespread and smoke developed index fire testing. <sup>2</sup> Calculated door section R-value is in accordance with DASMA TDS-163. <sup>3</sup> It is your responsibility to make sure your garage door meets local building codes. <sup>4</sup> For complete warranty details, visit [kelleyentrematic.com](http://kelleyentrematic.com) or contact your local Kelley dealer.


**PANEL**



RIBBED PANEL WITH STUCCO EMBOSSMENT

**COLORS**

Kelley steel doors are pre-painted; for custom colors, exterior latex paint must be used. Visit [kelleyentrematic.com](http://kelleyentrematic.com) for instructions on painting. Actual paint colors may vary from samples shown.



WHITE



SANDTONE



COMMERCIAL GRAY



COMMERCIAL BROWN

**WINDOW OPTIONS**



24" X 12" INSULATED GLASS  
Available with either a black or white frame.



24" X 6" DOUBLE INSULATED  
ACRYLIC WINDOWS WITH BLACK FRAME

**ENTREMATIC**

**Entrematic**  
165 Carriage Court  
Winston-Salem, NC 27105  
800.558.6960  
[www.kelleyentrematic.com](http://www.kelleyentrematic.com)

