

# **Design Highlights**

- Impactable Foam-fillled Side Members
- Roll-formed Galvanized Steel Framing
- Fiberglass Stays in Side/Head Curtains
- Translucent Head Member Transmits Light
- Raked Header for Moisture Run-off
- Foam Filled Draft Pads
- A Range of Colors and Fabrics

# HINGE GUARD™ Design Highlights

- Effectively seals hinge gap at opened trailer doors
- Made of High Molecular Weight Polyethylene (HMWPE)
- Attached Securely with Industrial Hook and Loop for Easy Replacement

The FoamSide® Truck Shelter combines the flexibility of a seal and the full trailer access of a shelter. It creates a tight seal between the building wall and the back of the truck. HINGE GUARD™ effectively prevents air infiltration into the warehouse through the trailer hinge gaps, saving energy and adding comfort for your employees.

Project Informatio
--------------------

Job Name \_\_\_\_\_ Address General Contractor Distributor \_\_\_\_\_ Quantity \_\_\_\_\_


## **Certified For Construction**

By
Company
Address
Date





1612 Hutton Drive, Suite 140 ▼ Carrollton, TX 75006, USA ▼ Tel: 800-558-6960 ▼ Fax: 972-389-4766 ▼ Email: sales@kelleyentrematic.com ▼ www.kelleyentrematic.com A continuing research program is in effect at Kelley. We reserve the right to incorporate product improvement at any time without prior notice.

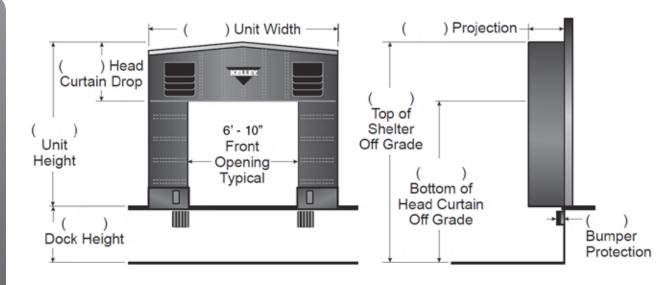

## TRUCKS AND TRAILERS SERVICED

Width:	Max.	Min.					
Height:	Max.	Min.					
Length:	Max.	Min.					
Type of Trailer: $\square$ S	tandard	☐ Refrigerated					
(*Not Applicable for Hinge Guard - Hydraulic							
Tailgate, Rear Step Section)							

### **APPLICATION DATA**

Door Width:	ft ir
Door Height:	ft in
Dock Height:	ft ir
Bumper Protection*:	in.
(*Includes bumper projection	n and any building
wall/foundation offset or car	ntilever)

QUANTITY					
Drive/Approach	□ Level □	Incline	□ Decline		% of Grade
Please check box from e	ach category:				
<b>Building Wall Structure</b>		Other			
Unit Width	□ <b>11</b> '-6"	11'-9"	□ 11'-10" □ 1	L2'-1"	
Unit Height	□ <b>11</b> '-0"	11'-6"	□ 12'-0" □ 1	L2'-6"	
Head Member Style	□ Raked □	Flat			
<b>Curtain Material</b>	$\square$ 22 oz. Vinyl	□ 40 oz	. Vinyl □ 40	oz. CSM	☐ XL-100 <sup>™</sup>
Color	□ Black □	Tan	□ Brown □	Blue	□ Green
Head Curtain Drop	□ 30" □ 36	5" \( \Bar{42}\)"	$\square$ 48" $\square$ 54"		
Taper	□ Yes □ No	)			
<b>Top Projection</b>	□ 24" □ 26	5″ □ 28″	□ 30" □ 36"	□ 42″	
<b>Bottom Projection</b>	□ 24″ □ 26	5″ □ 28″	□ 30" □ 36"	□ 42″	
Options	☐ Door Numbe	ers 🗆 Full	Length Guide Sti	ipes	

 $\hbox{$^*$Conversions: To convert measurements to metric, see formulas below:}$ 

Inches x 25.4 = millimeters (Example:  $4" \times 25.4 = 101.6 \text{ mm}$ )

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

\*Note: Consult factory for blockout application assistance.